











TRANSFORM YOUR BATH INTO

## A PERSONALIZED SANCTUARY...



**EFFERVESCENCE THERAPY**Enter the realm of tranquility



WHIRLPOOL THERAPY
Rejuvenate your body





## KOHLER.

## LOADED WITH FEATURES TO MAXIMIZE RELAXATION



Effervescence Ports



6 Hydromassage Jets



10 Back Jets



Adjustable Neck Jet Pillow



Chroma Therapy



Built In Heater

## **EFFERVESCENCE PORTS**



## 6 HYDROMASSAGE JETS











## ADJUSTABLE NECK JET PILLOW

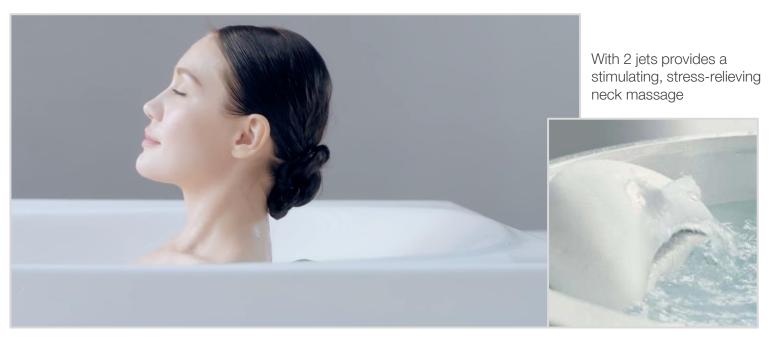

## **CHROMA THERAPY**

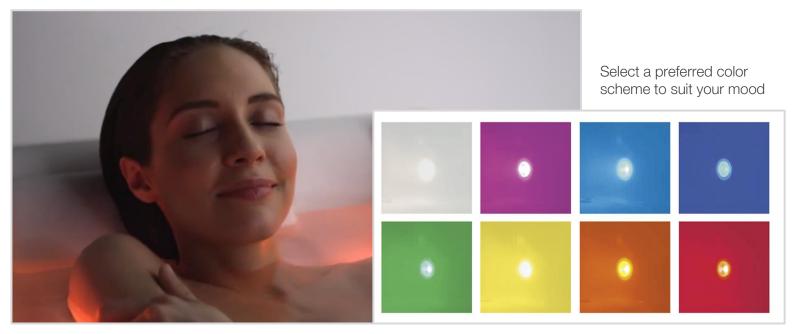




## **BUILT IN HEATER**




## CONTROL PANEL

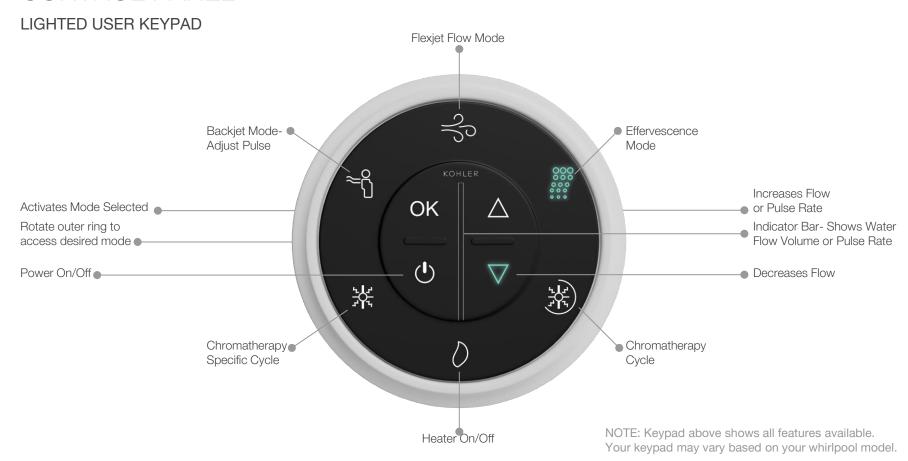





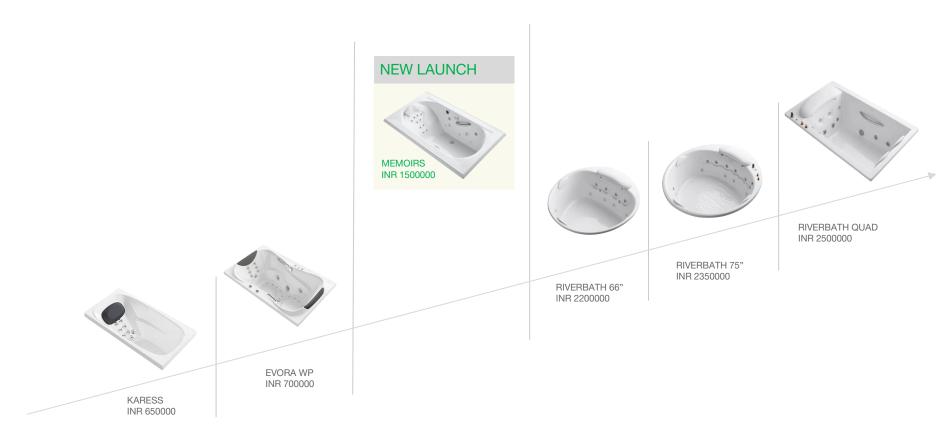



## UPGRADE TO MEMOIRS

	EVORA (187489IN-W03C-0)	MEMOIRS (1418-V-0)
MRP	700,000	15,00,000
No. of Pillows/Seating	2	1
Chroma therapy	Yes	Yes
Built in Heater	Yes	Yes
Lighted Keypad Control	Yes	Yes
Integral Lumbar Support	Yes	Yes
Effervescence	No	Yes
Variable Speed Pump	No	Yes
Neck Pillow Jets	No	Yes
Grab Bar Compatible	No	Yes
Water Depth(mm)	370	406



## ADDITIONAL COMPONENTS - MEMOIRS



**1418-V-0**Memoirs<sup>TM</sup> 6' Spa/ Massage Package WP MRP: 15,00,000





## KOHLER ADVANTAGE





#### **DURABLE**

Light weight sanitary grade acrylic material with Fiber Glass reinforcement gives more strength to the bathtub making it strong and sturdy



#### DESIGN

Ergonomic Design to ensure maximum comfort and safety



#### **EASY TO MAINTAIN**

Scratch, cracking and fading resistant. Easy to Clean



#### INDUSTRY BEST WARRANTY:

5 years for residential and 1 year for all electrical/electronic components for acrylic bathtubs \*Standard warranty varies basis bathtub material




## KOHLER BRAND ADVANTAGE WITH 25+ ENGINEERING TESTS:

All European and American Standards met

## SPECIFICATION SHEET



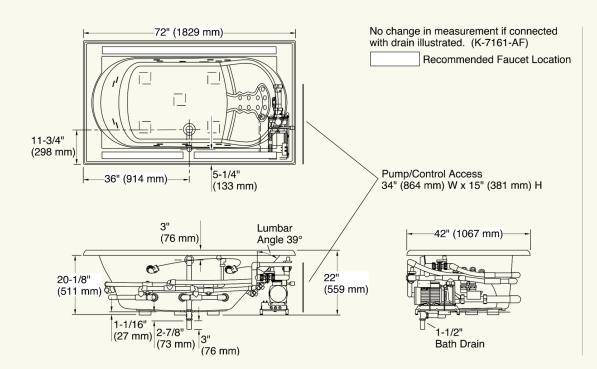

#### REQUIRED ELECTRICAL SERVICE

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). **Pump:** 240 V, 20 A, 50/60 Hz

#### **TECHNICAL INFORMATION**

All product dimensions are nominal.

Drain location: Center

Basin area, bottom: 41-3/4" x 27-3/16" (1060mm x 691mm)

Basin area, top: 60" x 30" (1524mm x 762mm)

Weight: 140 lbs (63.5 kg)

Minimum floor load: 44 lbs/ft<sup>2</sup> (214.8 kg/m<sup>2</sup>)

Water depth: 16" (406 mm)
Water capacity:86 gal (325.5 L)

Cutout: Drop-in, 70-1/2" x 40-1/2" (1791 mm x1029 mm) Electrical component rating: Pump: 240V, 11A, 50/60Hz,

1500W

Pump speed: Variable

